


Dust extraction unit with standard filtering area EKO R9-R36, without fan.

EKO R series dust filtering equipment is created for indoor use. The type of filtering elements used for this equipment are sleeve filters. Fan not supplied, equipment for connection to existing dust source.

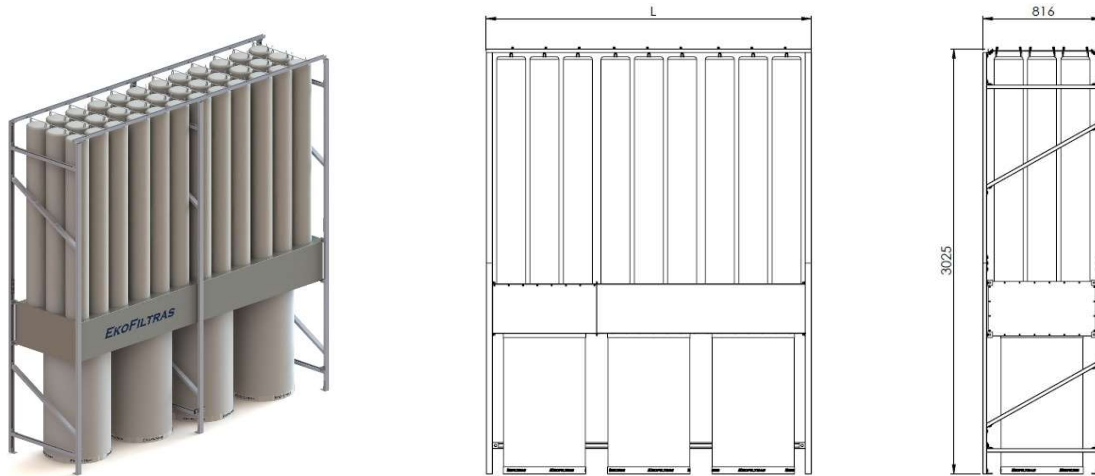

	EKO R9	EKO R18	EKO R27	EKO R36
Number of sections	1	2	3	4
Fan motor power, kW	-	-	-	-
Voltage, V	-	-	-	-
Rec. max. air flow rate, m ³ /h	1800	3600	5400	7200
Max. pressure, Pa	2500	2500	2500	2500
Air inlet dimensions, mm	D160 *	D200 *	D250 *	D315 *
Air outlet dimensions, mm	-	-	-	-
Filtering sleeves, pcs.	9	18	27	36
Filtration area, m ²	9	18	27	36
Sleeves dimensions D/H, mm	200/1550	200/1550	200/1550	200/1550
Filter media	PES/AS 400	PES/AS 400	PES/AS 400	PES/AS 400
Dust collection	Bags	Bags	Bags	Bags
Buttom bags pcs.	1	2	3	4
Bags dimensions D/H mm	560/1000	560/1000	560/1000	560/1000
1 pc. Buttom bag capacity	0,25	0,25	0,25	0,25
Weight kg				
Unit H	3025	3025	3025	3025
Dimensions B	816	816	816	816
mm L	810	1530	2250	2970
Price without VAT	-	-	-	-



* - Possible special size rectangular or round hole.

- ¹ The height may vary due to unload system realization.

- Automation supplied on request, not included in the price.
- The pictures show standard equipment.
- Non-standard dimensions are available, or variants of special modifications.
- Different filtration media are available, customized as required.
- UAB EkoFiltras the manufacturer reserves the right to improve technical parameters or dimensions without prior notice.

Dust extraction unit with standard filtering area EKO R9-R36, without fan.

EKO R series dust filtering equipment is created for indoor use. The type of filtering elements used for this equipment are sleeve filters. Fan not supplied, equipment for connection to existing dust source.

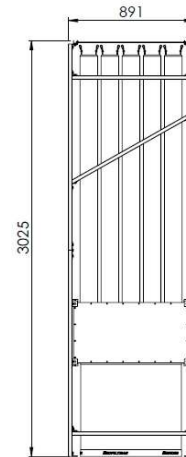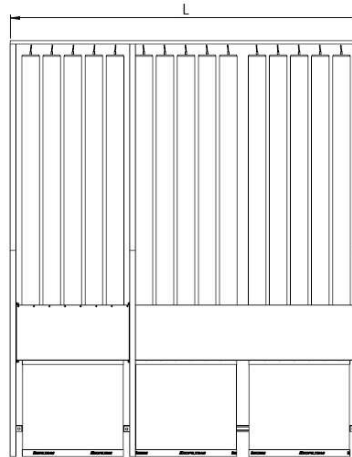

	EKO R25	EKO R50	EKO R75	EKO R100	EKO R125
Number of sections	1	2	3	4	5
Fan motor power, kW	-	-	-	-	-
Voltage, V	-	-	-	-	-
Rec. max. air flow rate, m ³ /h	2200	4400	6600	8800	11000
Max. pressure, Pa	2500	2500	2500	2500	2500
Air inlet dimensions, mm	D160 *	D200 *	D250 *	D315 *	300x300 *
Air outlet dimensions, mm	-	-	-	-	-
Filtering sleeves, pcs.	25	50	75	100	125
Filtration area, m ²	18	36	54	72	90
Sleeves dimensions D/H, mm	125/1850	125/1850	125/1850	125/1850	125/1850
Filter media	PES/AS 400	PES/AS 400	PES/AS 400	PES/AS 400	PES/AS 400
Dust collection	Bags	Bags	Bags	Bags	Bags
Bottom bags pcs.	1	2	3	4	5
Bags dimensions D/H mm	710/820	710/820	710/820	710/820	710/820
1 pc. Bottom bag capacity	0,32	0,32	0,32	0,32	0,32
Weight kg					
Unit H	3025	3025	3025	3025	3025
Dimensions B	891	891	891	891	891
mm L	900	1700	2510	3310	4110
Price without VAT	-	-	-	-	-

* - Possible special size rectangular or round hole.

- ¹ The height may vary due to unload system realization.

- Automation supplied on request, not included in the price.
- The pictures show standard equipment.
- Non-standard dimensions are available, or variants of special modifications.
- Different filtration media are available, customized as required.
- UAB EkoFiltrat the manufacturer reserves the right to improve technical parameters or dimensions without prior notice.