
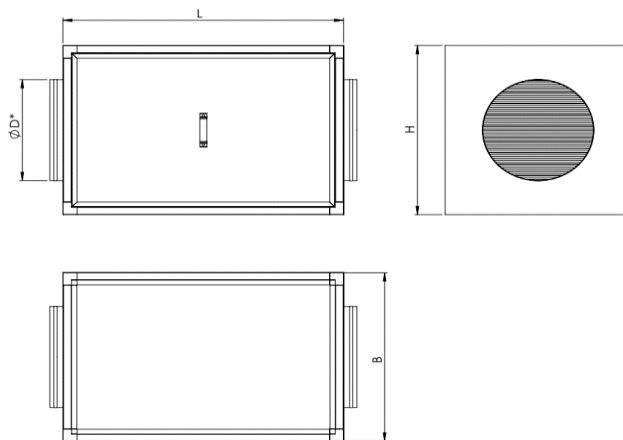


FILTRATION UNITS WITH ACTIVATED CARBON EKO AC

EKO AC series activated carbon filters shall be used for air filtration of undesirable odors, chemical compounds, solvents and others pollutants. Main areas of application: Exhaust from paint shops and spraying booths and from welding units, exhaust from waste water treatment plants, exhaust from nuclear power plants, adsorption of harmful pollutants in the chemical and electronic industry, intake into airport and station halls, removal of odour from kitchens, meat production, intake and exhaust from operating rooms, intensive care units and clean rooms, production of electronics and other areas.

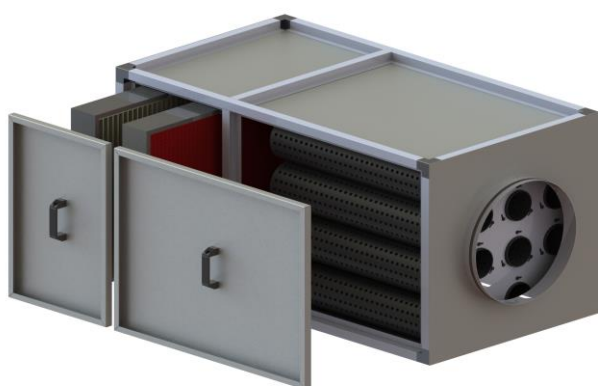

Type	4 Cartridges units			8 Cartridges units			16 Cartridges units		
	AC4-250	AC4-450	AC4-600	AC8-250	AC8-450	AC8-600	AC16-250	AC16-450	AC16-600
Max. air flow m ³ /h	300	600	800	600	1200	1600	1200	2400	3200
Working air flow, m ³ /h	200	400	600	400	800	1200	800	1600	2400
Pressure drop at working air flow	75	145	246	150	160	184	115	159	295
Carbon capacity, kg	4,4	8,4	12	8,8	16,8	24	17,6	33,6	48
Cartridges length, mm	250	450	600	250	450	600	250	450	600
AC unit dimension, mm	H	410		670			670		
	B	410		365			670		
	L	750	100	1200	750	100	1200	750	100
Price without VAT.									

*- Filter units connections are selected according to the customer's needs.

** - Pressure drop at working air flow with pre-filters PLT XL G4 ir MPL F7 .

- Pre-filterare not included in the prices, we select individually according to the needs of the client.
- Possible insulation filter units (with 30 mm wool).
- The pictures show standard equipment.
- Non-standard dimensions are available, or variants of special modifications.
- UAB EkoFiltras the manufacturer reserves the right to improve technical parameters or dimensions without prior notice.

PRE-FILTERS			
Type	4 Cartridges units	8 Cartridges units	16 Cartridges units
PLT XL G4			
MPL M5			
MPL F7			
MPL F9			

Carbon pelletized	
Carbon pelletized	Ø 3 mm
1 kg price	
Packaging kaina 25 kg	

