


EKO R "VIBRO Closed" dust filtration units are made for indoor and outdoor use, for the suction of dusty air with shavings and dust. The housing can be acoustically isolated, reduce the volume of the equipment. During the filtration procedure cleaned warm air remains inside the building, reducing heating costs. EKO R "VIBRO Closed" type units have very large filtration area, as it come with sleeve type filters. Big filtration surface is the main factor, determining good suction power for the system and ensuring high air speed in the ductwork.

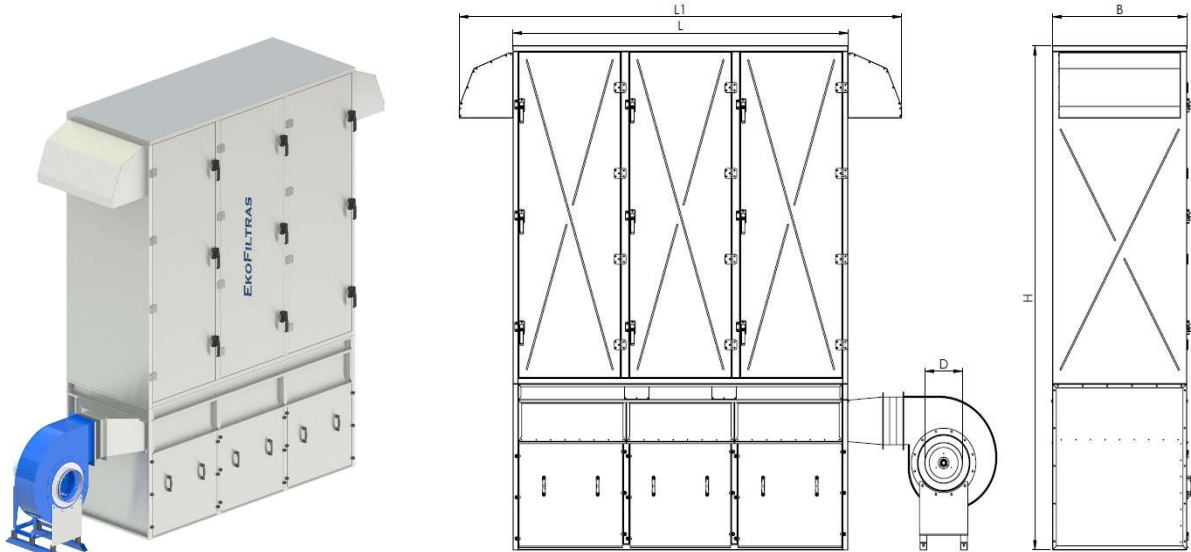

	<b>EKO R25 VIBRO CLOSED NR310</b>	<b>EKO R50 VIBRO CLOSED NR350</b>	<b>EKO R75 VIBRO CLOSED NR400</b>	<b>EKO R100 VIBRO CLOSED NR450</b>	<b>EKO R125 VIBRO CLOSED NR500</b>
Number of sections	1	2	3	4	5
Fan motor power, kW	1,5	2,2	4	7,5	11
Voltage, V	400	400	400	400	400
Rec. max. air flow rate, m <sup>3</sup> /h	2700	3850	6150	8500	12000
Max. pressure, Pa	1650	2100	2770	3720	3920
Air inlet dimensions, mm	225	250	280	315	355
Air outlet dimensions, mm	*	*	*	*	*
Filtering sleeves, pcs.	25	50	75	100	125
Filtration area, m <sup>2</sup>	18	36	54	72	90
Sleeves dimensions D/H, mm	125/1850	125/1850	125/1850	125/1850	125/1850
Filter media	PES/AS 400	PES/AS 400	PES/AS 400	PES/AS 400	PES/AS 400
Dust collection	Bags	Bags	Bags	Bags	Bags
Buttom bags pcs.	1	2	3	4	5
Bags dimensions D/H mm	710/820	710/820	710/820	710/820	710/820
1 pc. Buttom bag capacity	0,32	0,32	0,32	0,32	0,32
Weight kg	295	485	710	950	1260
Unit H	3490	3490	3490	3490	3490
Dimensions B	1000	1000	1000	1000	1000
mm L	?	?	?	?	?
Filter cleaning	Vibro	Vibro	Vibro	Vibro	Vibro
Vibro motor power	0,18 kW	0,18 kW	0,18 kW	0,18 kW	0,18 kW
Automation	Start/Stop + Vibro	Start/Stop + Vibro	Start/Stop + Vibro	Start/Stop + Vibro	Start/Stop -0/Y/D + Vibro
<b>Price without VAT.</b>	-	-	-	-	-

\* - Possible special size rectangular or round hole.

- <sup>1</sup> The height may vary due to unload system realization.

- Automation supplied on request, not included in the price.
- The pictures show standard equipment.
- Non-standard dimensions are available, or variants of special modifications.
- Different filtration media are available, customized as required.
- UAB EkoFiltras the manufacturer reserves the right to improve technical parameters or dimensions without prior notice.