
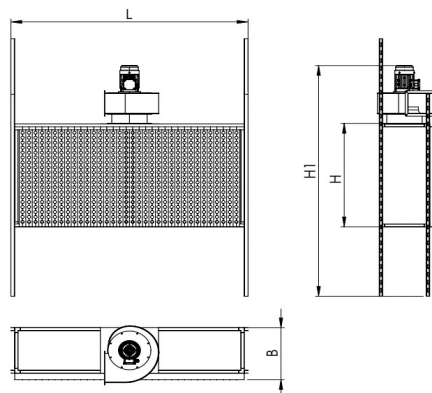


Spray booths H-1000mm



We offer spray booths made of aluminum construction and plated with galvanized sheet metal. Paint extraction systems are supplied with explosion-proof EX fans or with standard type fans. Spray booths can be mounted with reflectors - airflow deflector, improving air flow and the movement of paint particles in the direction of the filters.

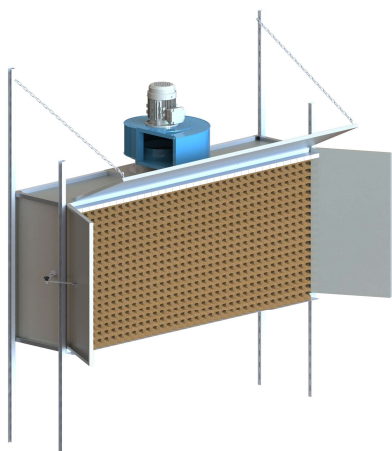

		1000	1500	2000	2500	3000	3500	4000
Technical data:								
Recommended efficiency m3/h		2000	3000	4000	5000	6000	7000	8000
Filtration area m ²		1	1,5	2	2,5	3	3,5	4
Resistance, Pa		400						
Filter dimensions, mm	H	1040						
	H _{1 max}	2500						
	B _{max}	750						
	L	1000	1500	2000	2500	3000	3500	4000
Filters:								
1st level: Pleated cardboard filter								
2nd level: Oiled glass fiber filter								
3rd level: Prefilter G4 PES220								
Price 2 levels spray booths €		-	-	-	-	-	-	-
Price 3 levels spray booths €		-	-	-	-	-	-	-
Recommended fans:								
Fan		Next 2037 0.37kW	Next 2075 0.75kW	Next 211 1.1kW	Next 222 2.2kW	RFB350 4kW	RFB350 4kW	RFB350 4kW
	EX	Next 2025 0.25kW	RFB 280 1.1kW	RFB 350 2.2kW	RFB 350 2.2kW	RFB350 4kW	RFB350 4kW	RFB350 4kW
Standard tipping € without VAT		-	-	-	-	-	-	-
EX tipping € without VAT		-	-	-	-	-	-	-

- All recommended fans are 400V/ 3Ph-50Hz
- The pictures show standard equipment.
- Non-standard dimensions are available, or variants of special modifications.
- UAB EkoFiltras the manufacturer reserves the right to improve technical parameters or dimensions without prior notice.



Spray booths H-1500

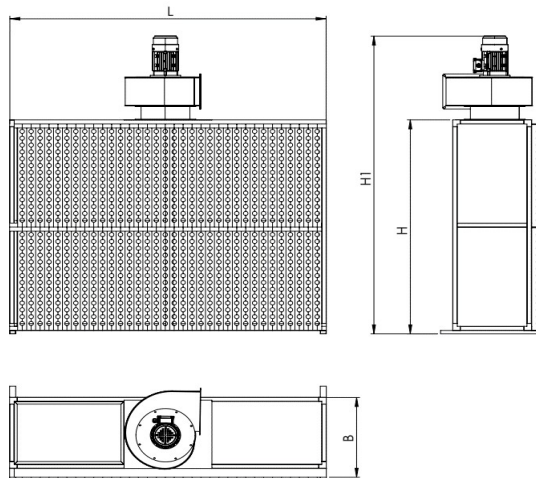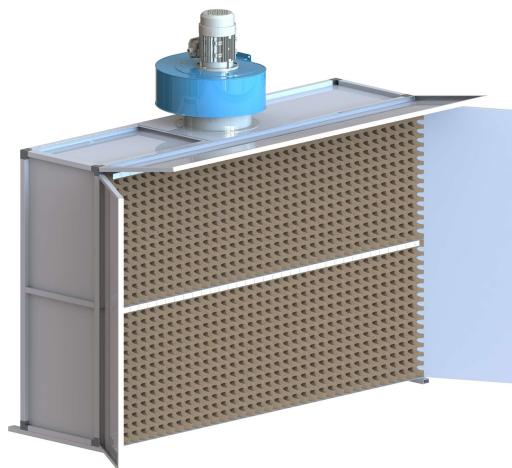

		1000	1500	2000	2500	3000	3500	4000
Technical data:								
Recommended efficiency m ³ /h		3000	4500	6000	7500	9000	10500	12000
Filtration area m ²		1,5	2,25	3	3,75	4,5	5,25	6
Resistance, Pa		400						
Filter dimensions, mm	H	1565						
	H _{1max}	2250						
	B _{max}	750						
	L	1000	1500	2000	2500	3000	3500	4000
Filters:								
1st level: Pleated cardboard filter								
2nd level: Oiled glass fiber filter								
3rd level: Prefilter G4 PES220								
Price 2 levels spray booths €		-	-	-	-	-	-	-
Price 3 levels spray booths €		-	-	-	-	-	-	-
Recommended fans:								
Fan		Next 2075 0.75kW	Next 222 2.2kW	RFB350 4kW	RFB350 4kW	NRB503 2,2kw	NRB560 3kW	NRB560 4kW
	EX	RFB 280 1.1kW	RFB 350 2.2kW	RFB350 4kW	RFB350 4kW	NRB503 2,2kw	NRB560 3kW	NRB560 4kW
Standard tipping € without VAT		-	-	-	-	-	-	-
EX tipping € without VAT		-	-	-	-	-	-	-

- All recommended fans are 400V/ 3Ph-50Hz
- The pictures show standard equipment.
- Non-standard dimensions are available, or variants of special modifications.
- UAB EkoFiltras the manufacturer reserves the right to improve technical parameters or dimensions without prior notice.



Spray booths H-2000

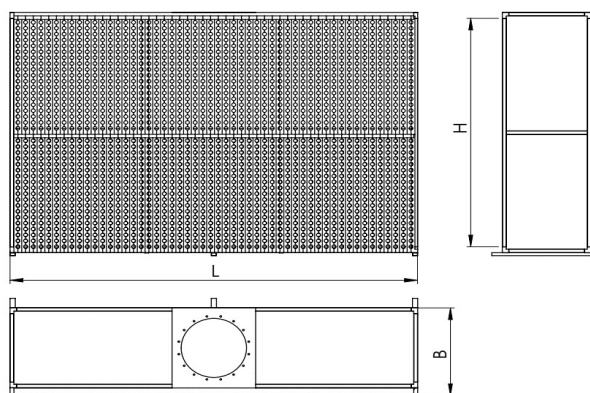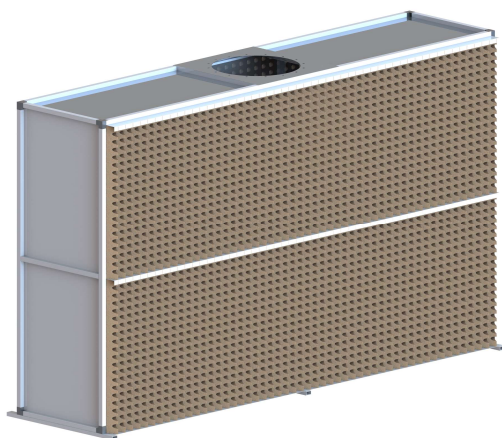

		1500	2000	2500	3000
Technical data:					
Recommended efficiency m ³ /h		6000	8000	10000	12000
Filtration area m ²		3	4	5	6
Resistance, Pa		400			
Filter dimensions, mm	H	2040			
	B _{max}	750			
	L	1500	2000	2500	3000
Filters:					
1st level: Pleated cardboard filter					
2nd level: Oiled glass fiber filter					
3rd level: Prefilter G4 PES220					
Price 2 levels spray booths €		-	-	-	-
Price 3 levels spray booths €		-	-	-	-
Recommended fans:					
Fan		RFB350 4kW	RFB350 4kW	NRB560 3Kw	NRB560 4Kw
	EX	RFB350 4kW	RFB350 4kW	NRB560 3Kw	NRB560 4Kw
Standard tipping € without VAT		-	-	-	-
EX tipping € without VAT		-	-	-	-

- All recommended fans are 400V/ 3Ph-50Hz
- The pictures show standard equipment.
- Non-standard dimensions are available, or variants of special modifications.
- UAB EkoFiltrAS the manufacturer reserves the right to improve technical parameters or dimensions without prior notice.

Spray booths H-2500

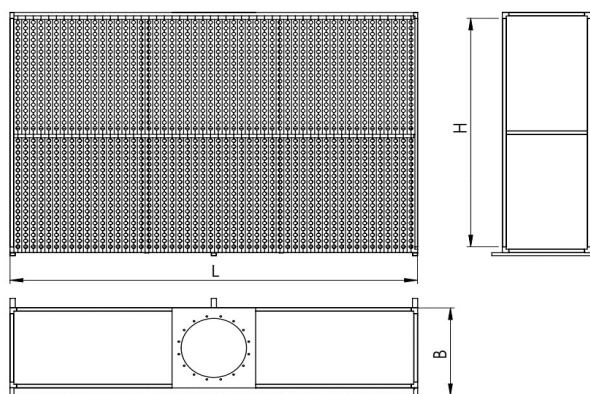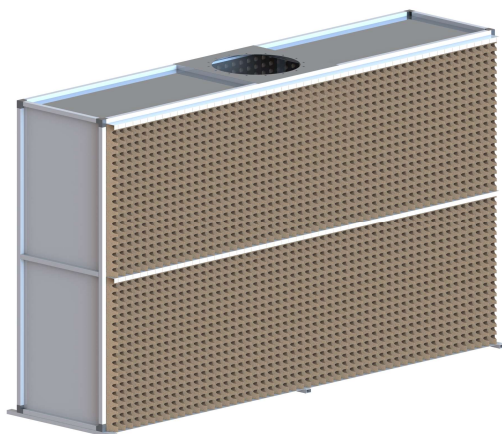

		2000	2500	3000
Technical data:				
Recommended efficiency m ³ /h		10000	12500	15000
Filtration area m ²		5	6,25	7,5
Resistance, Pa		400		
Filter dimensions, mm	H	2540		
	B _{max}	750		
	L	2000	2500	3000
Filters:				
1st level: Pleated cardboard filter				
2nd level: Oiled glass fiber filter				
3rd level: Prefilter G4 PES220				
Price 2 levels spray booths €		-	-	-
Price 3 levels spray booths €		-	-	-
Recommended fans:				
Fan		NRB560 3Kw	NRB560 4Kw	NRB560 4Kw
	EX	NRB560 3Kw	NRB560 4Kw	NRB560 4Kw
Standard tipping € without VAT		-	-	-
EX tipping € without VAT		-	-	-

- All recommended fans are 400V/ 3Ph-50Hz
- The pictures show standard equipment.
- Non-standard dimensions are available, or variants of special modifications.
- UAB EkoFiltras the manufacturer reserves the right to improve technical parameters or dimensions without prior notice.