
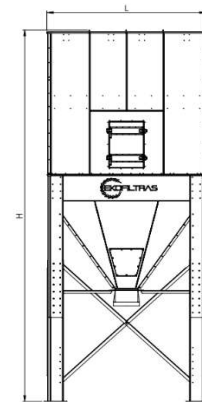


## DUST EXTRACTION UNIT EKO R BB

Sleeve filter for wood waste with vibro cleaning. EKO R BB series dust filtering equipment is created for outdoor use. Filter sleeves cleaning automatically, when the fan is stopped. The recommended maximum working time is 4 h. Supplied without fan and automation (selected according to the specific requirements of the client). Dust collection into BIG BAG.

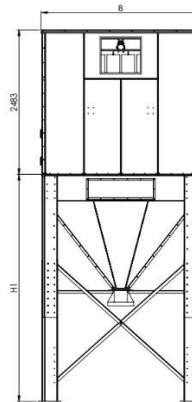

|  |    | EKO R BB 6x6 | EKO R BB 8x8 | EKO R BB 10x10 |
|--|----|--------------|--------------|----------------|
| Rec. Max. air flow rate, m <sup>3</sup> /h |    | 4500         | 8000         | 12500          |
| Max. pressure, Pa                          |    | 3500         | 3500         | 3500           |
| Air inlet dimensions, mm                   |    | 600x200      | 800x250      | 1000x300       |
| Air outlet dimensions, mm                  |    | 400x400      | 500x500      | 600x600        |
| Filtering sleeves, pcs.                    |    | 36           | 64           | 100            |
| Filtration area, m <sup>2</sup>            |    | 45           | 80           | 125            |
| Sleeves dimensions D/H mm                  |    | 200/2000     | 200/2000     | 200/2000       |
| Filter media                               |    | PES/AS 400   | PES/AS 400   | PES/AS 400     |
| Dust collection                            |    | BIG BAG      | BIG BAG      | BIG BAG        |
| Weight, kg                                 |    | 850          | 1250         | 1800           |
| Unit dimension, mm                         | H  | 5731         | 6031         | 6384           |
|  | H1 | 3251         | 3551         | 3901           |
|  | B  | 1620         | 2048         | 2454           |
|  | L  | 1620         | 2048         | 2454           |
| Filter cleaning                            |    | Vibro        | Vibro        | Vibro          |
| Vibro motor power, kW                      |    | 1 x 0.18     | 1 x 0.18     | 2 x 0.18       |
| <b>Price eur without VAT.</b>              |    | -            | -            | -              |

- The pictures show standard equipment.
- Non-standard dimensions are available, or variants of special modifications.
- UAB EkoFiltras the manufacturer reserves the right to improve technical parameters or dimensions without prior notice.

## Additional options

**Rotary dispenser:** sused for unloading waste from a filter without pressure (waste flows into an open container.)

|                     |     |
|---------------------|-----|
| Motor power, kW     | 1,1 |
| Motor rotation, RPM | 24  |
| Max. rate, L/min    | 480 |



\* - Tikslinama pagal dulkių tipą ir kiekį

- Paveikslėliuose vaizduojami standartinės komplektacijos įrenginiai.
- Galimi nestandartinių išmatavimų, ar specialių modifikacijų variantai.
- UAB EkoFiltrAS tobulindamas gaminius pasilieka teisę keisti techninius parametrus ar matmenis be išankstinio perspėjimo.